



pulley for hauling.

Aluminium alloy

main structure.

Thickness: 3.5 mm

Innovative foot-ascender wich includes our new patented rollers for high-efficiency climbing. New harness perfectly fits on all boots. It can be used also as locking pulley, for hauling purposes only.

Two versions available:

- 2258 left;
- 2259 right.



Adjustment buckle

for lower strap.




Patented stainless steel rollers for low friction on the rope.

Aluminium alloy fast-buckle.

Soft spring inside, allows easy insertion and removal of the rope.

Hole for connector. It allows use of the device as locking

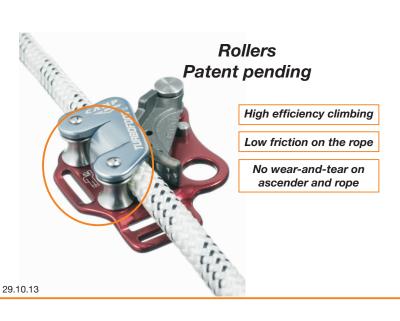

Reinforcement webbing.